

<https://doi.org/10.22201/igeof.00167169p.2022.61.1.2189>

PROJECTION OF LAND USE TO 2030 AND ITS IMPACTS ON WATER AVAILABILITY IN A BRAZILIAN SUB-BASIN: A LCM AND SWAT APPROACH

Adriana Paulo de Sousa Oliveira^{1*}, Rafaela Ribeiro Gracelli¹, Arthur Amaral e Silva¹, Vitor Juste dos Santos¹, Jackeline de Siqueira Castro¹ and Maria Lúcia Calijuri¹.

Received: August 2, 2021; accepted: December 13, 2021; published on-line: January 1, 2022.

RESUMEN

Los cambios en el uso y la cobertura del suelo pueden resultar en cambios significativos en el régimen del flujo de una cuenca hidrográfica. Los estudios predictivos sobre el uso del suelo y su interferencia con la disponibilidad del agua ayudan a identificar eventos extremos con anticipación a fin de proponer medidas de gestión adecuadas. De esta forma, este estudio tuvo como objetivo realizar la predicción del uso del suelo para el año 2030 para la subcuenca del Alto Río Grande (ARG), ubicada en el sureste de Brasil. Esta región fue elegida por el uso intenso de los recursos hídricos y por haber enfrentado, recientemente, escasez de agua como resultado de sequías prolongadas y una gestión inadecuada de los recursos hídricos. Para la predicción del uso del suelo en 2030 se utilizó el Land Change Modeler (LCM), el mapa obtenido se insertó en el modelo Soil and Water Assessment Tool (SWAT) previamente calibrado y validado para las condiciones ambientales y climáticas de la región. La subcuenca ARG fue afectada por fuertes lluvias en 2011 que resultaron en cambios en el paisaje debido a deslizamientos de tierra. Esta particularidad de la región contribuyó para que la predicción del uso del suelo para el año 2030 presente un aumento de bosques y pastos en detrimento de las áreas agrícolas. Al evaluar los impactos de estos cambios en la disponibilidad del agua, se observó que el modelo SWAT presentó, para las mismas condiciones de precipitación, una reducción en los caudales pico de hasta 59% y una reducción en el caudal promedio mensual de hasta 63% en 2030 en relación con el uso del suelo observado en 2017. Es decir, este estudio hace un aporte importante al identificar una reducción considerable en la disponibilidad del agua. Estos resultados ayudarán a formular estrategias para la gestión de los recursos hídricos y la adopción de medidas para promover la seguridad hídrica en la región.

PALABRAS CLAVE: Modelamiento de cambio de uso del suelo, predicción del escurrimiento, modelamiento de cuencas hidrográficas y recursos hídricos.

*Corresponding author at adrianasousaesa@hotmail.com

¹Federal University of Viçosa, Department of Civil Engineering, Advanced Environmental Research Group – nPA, 36570-900, Brazil

ABSTRACT

Changes in land use and land cover (LULC) can result in significant changes in a hydrographic basin flow regime. Future projections about LULC and its interference with water availability help to identify extreme events in advance and help propose appropriate management measures. Thus, this study aimed to make the LULC projection for the year 2030 for the Alto Rio Grande (ARG) sub-basin, located in Southeastern Brazil. This region was chosen because of its intense water resources use and for having recently faced water scarcity as result of prolonged droughts and inadequate water resources management. To identify the LULC trend for the year 2030, the Land Change Modeler (LCM) was used, the map obtained was inserted in the Soil and Water Assessment Tool (SWAT) model previously calibrated and validated for the region' environmental and climatic conditions. The ARG sub-basin was affected by heavy rains in 2011, which resulted in changes in the landscape due to landslides. This particularity of the region contributed to the projection of LULC for the year 2030 to present an increase in forest and pastures to the agricultural areas detriment. When evaluating the impacts of these changes in water availability, it was observed that the SWAT model presented, for the same rainfall conditions, a reduction in peak streamflows of up to 59% and a reduction in the average monthly flow of up to 63% in 2030 in relation to the LULC observed in 2017. Thus, this study provides an important contribution by identifying a considerable reduction in water availability. These results will help to formulate strategies for water resources management and the adoption of measures to promote water security in the region.

KEY WORDS: land change modeler, projection flow, watershed modelling and water resources.

INTRODUCTION

Land use and land cover (LULC) changes are factors that alter the hydrological processes in river basins, with adverse effects on flow regime and water balance. Studies carried out in different regions of the world have shown that forested areas to pastures or urban areas conversion decreases evapotranspiration, increases runoff, reduces infiltration and groundwater recharge (Anand *et al.*, 2018; Gabiri *et al.*, 2019; Jodar-Abellan *et al.*, 2019; Natkhin *et al.*, 2015; Zhang *et al.*, 2020). These changes can result in biodiversity losses, in addition to threatening socioeconomic development (Andrade *et al.*, 2019; FAO, 2011; Joly *et al.*, 2019; Marques *et al.*, 2019). Since half-billion people around the world face severe water scarcity throughout the whole year (Hoekstra, 2016), predicted flow rate has been a key driver to appropriate management measures. In this context, it is essential to project future scenarios to identify possible LULC and their consequences in flow regimes.

This is not a trivial task and requires sophisticated techniques application that take into account the LULC dynamic and the hydrological processes complexity. The integration of LULC prospecting and hydrological simulation models closely related to Geographic Information Systems (GIS) are indicated for this function. This integration allows the definition of LULC scenarios considering a pattern of changes and the simulation of current and future interferences in the water resources flow in response to these changes (Anand *et al.*, 2018; Van Cauwenbergh *et al.*, 2018).

The Land Change Modeler (LCM) is a tool for land planning (Eastman and Toledano, 2018). In LCM, the LULC is modelled empirically as a function of a set of explanatory spatial variables (whether constraints or incentives) and an observed rate of change between two distinct periods

(Kafy *et al.*, 2020; Mas *et al.*, 2014). To assess LULC hydrological impacts, process-based hydrological models, such as the Soil and Water Assessment Tool (SWAT) are being applied in different scales hydrographic basins, in countries with varied climatic and topographic conditions and with limited data quantity and quality (Bieger *et al.*, 2013; Jodar-Abellan *et al.*, 2019; Joorabian Shooshtari *et al.*, 2017; Krysanova and White, 2015; Marhaento *et al.*, 2018; Natkhin *et al.*, 2015; Piniewski *et al.*, 2019; Saha *et al.*, 2019; Zhang *et al.*, 2020, 2018).

By considering the hydrographic basin characteristics (such as soil type, topographic data, climate information and land use maps), the model is able to adequately represent water availability (Krysanova and White, 2015). This capacity together with the possibility of inserting land use maps allows SWAT to be used to project the impact of changes in LULC on the flow of a water body. However, this multi-model approach through the joint use of LCM and SWAT is developing and there are few studies reporting this interaction.

On the other hand, the results obtained so far reveal the great potential of this application. Joorabian Shooshtari *et al.* (2017) elaborated a prospective LULC map for 2050 using LCM and identified the changes in interferences observed in runoff using SWAT. Authors found that the projected change for land use is relatively small, so the impact on discharges is also modest (annual increase of 3%), but not negligible. Abbasi *et al.* (2021) in a similar study, applied the LCM to the 2032 LULC projection and determined the impacts on green water safety using SWAT. The results obtained by the authors showed an increase in pastures and urban area while forests and agricultural area reduced. These changes, associated with the most critical climate change scenario, resulted in a reduction of about 9% in green water flow and 44% in green water storage for the study region.

In tropical regions, such as Brazil, hydrological processes differ from other regions due to higher energy inputs and rates of change (Wohl *et al.*, 2012). The consequences of these changes and the knowledge of the main hydrological interactions is limited (Wohl *et al.*, 2012), which makes it difficult to adopt effective measures to guarantee water availability in the future. Brazil's economy is heavily dependent on water resources. The country stands out in agricultural production and has almost 7 million hectares of irrigated area with an expected increase of 3 million hectares by 2030 (ANA, 2017). Additionally, about 90% of Brazilian energy is supplied by hydroelectric plants (Pineiro *et al.*, 2019).

Thus, the main motivation of this work is to advance in research regarding the joint use of the LCM and SWAT models to project water availability, contributing, together with society and the scientific community, in increasing the database related to the application of these two models. For this assessment, the ARG sub-basin located in South-eastern Brazil was chosen, a region that has an intense water resources use and that recently faced one of the biggest water crises in its history. In addition, mass movements providing significant changes in the landscape affected the region.

MATERIALS AND METHODS

1. STUDY AREA

The study area comprises the ARG sub-basin (Figure 1), located in the western portion of Nova Friburgo county, in the mountain region of Rio de Janeiro state, Brazil. ARG sub-basin has an area of 236 km², which corresponds to 25% of Nova Friburgo county total area, with Rio Grande as its main watercourse. It is composed of forest remnants (62%), pastures and agricultural areas, which

represents 36% of the total area. There are no urban areas in the basin and the Nova Friburgo municipality is about 12 km away (MapBiomias, 2018). ARG sub-basin has mainly Cambisol soils, which is usually associated with undulating mountain relief areas (Zaroni and Santos, 2018).

The municipality, inserted in the Atlantic Forest biome, rated as Montane Ombrophilous Dense Forest. This region presents rugged topography and high slopes, reaching 2,300 m. According to the Köppen classification, the climate is tropical altitude (Cwb). The average annual minimum and maximum temperatures are respectively 14.5°C and 25.10°C and annual rainfall average is around 2,000 mm, with November to March being the rainiest period and April to October the driest months (Baptista, 2009; INMET, 2021). This study site was chosen because the region has been affected by critical water scarcity events resulting from prolonged droughts and inadequate water resource management (Britto *et al.*, 2018).

ARG sub-basin is responsible for meeting the demand in the metropolitan region of Rio de Janeiro, with agricultural crops such as vegetables. Those cultures demand frequent irrigation (through abstractions in Rio Grande River), which places the municipality in a prominent position in relation to the total irrigated area, being the fourth largest in the State. Rio Grande River's source is still used for animal consumption, sand extraction, distilled beverages manufacture and aquaculture (AGEVAP, 2014, 2013; IBGE, 2017; INEA, 2020). Since the Rio Grande River is also used for public water supply estimated at 185 thousands of inhabitants (IBGE, 2017), population growth expectations

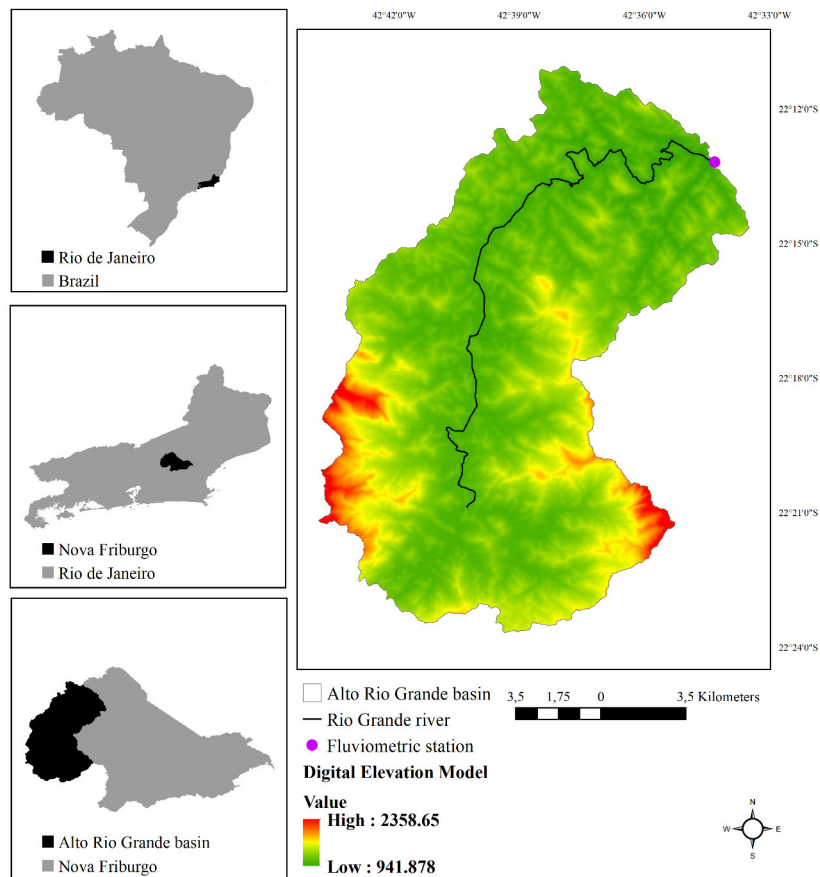


Figure 1. Study area location

and agricultural and industrial expansion call attention to water availability, with the risk of a considerable reduction, not only due to the increase in water demand, but also due to LULC.

This work aimed to determine water availability in the ARG sub-basin for the year 2030 in response to LULC. To achieve these objectives, the LCM tool was applied to identify possible LULC in 2030. The image for 2030 obtained was inserted in the SWAT model to obtain flow regime in Rio Grande (Figure 2). At this stage, it was considered that the lowest rainfall observed in the ARG sub-basin will occur again, simulating a critical scenario in terms of water availability. For this analysis, LULC in 2030 used for all years in the future. Year 2030 was adopted because the national and regional agencies, responsible for water resources management, use this range for some demand projections (ANA, 2017; INEA, 2014), therefore, determining water availability for 2030 consists, among others, in an opportunity to assist decision makers.

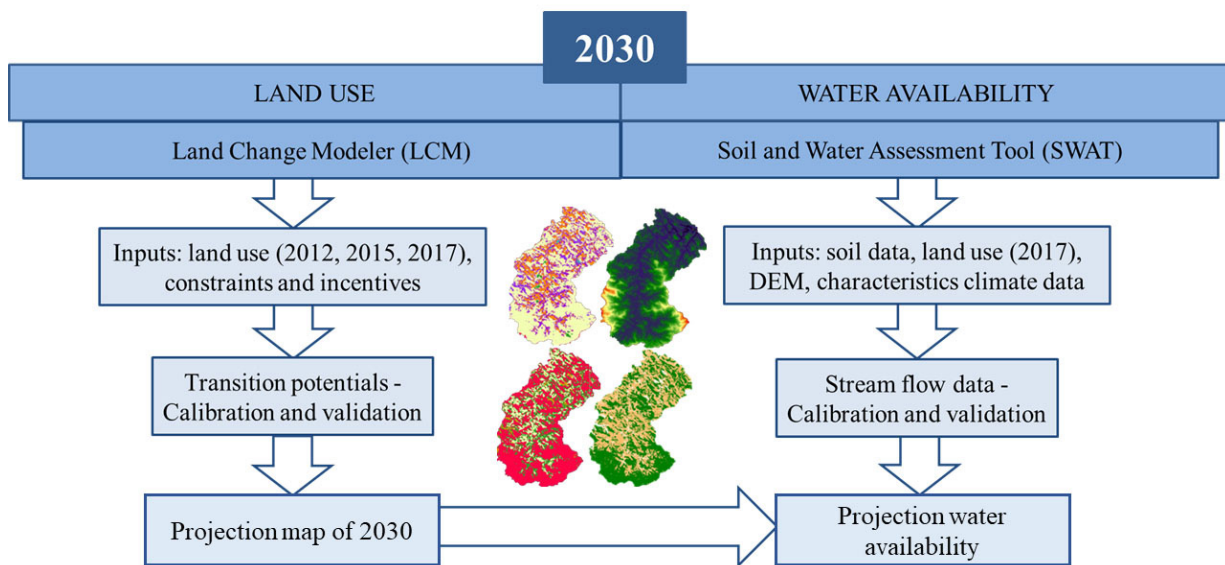


Figure 2. Flowchart of the methodology used in this study

2. LAND CHANGE MODELER (LCM)

LCM is an Idrisi Selva software (currently TerrSet) tool developed by Clark Labs of Clark University and consists of a spatially explicit dynamic model, based on an inductive pattern. The LCM is a LULC projection tool that uses historical land cover change to model the relationship between land cover transitions and explanatory variables to map future scenarios (Eastman and Toledano, 2018). This process of LULC modelling is organized into major stages that include: change analysis; transition predictions; validate and future projection.

Change analysis: LCM models LULC considering a rate of change observed between two different periods and a set of explanatory variables. In this study, the rate of change was defined using land cover maps for the years 2012 and 2015. These years were selected because on January 11 and 12, 2011, an anomalous precipitation (253 mm in 37 h) triggered mass movements in the region where Nova Friburgo is located. These mass movements caused significant changes in the landscape, great

social and economic damage that gave a new dynamic of LULC in the region which must be known and projected for proper management.

The ARG sub-basin LULC map used as input data into the LCM were obtained from the Annual Land Cover and Land Use Mapping Project of Brazil (MapBiomias). Produced by a pixel-by-pixel classification of Landsat satellite images. The LULC classes were adapted to “*Forest*” which includes planted and native forests, being the second most present land cover; “*Pasture*”; “*Waterproofed areas*” which include rural dwellings and rocky outcrops; and the “*Mosaic of agriculture and pasture*”. The last category results from the difficulty in differentiating between certain agricultural crops and the grasses that compose the pastures, allowing possible spatial inconsistencies in the classifications (MapBiomias, 2018).

After inserting the LULC images in the LCM, on the Change Analysis tab it is possible to identify the changes that occurred between the evaluated years (2012 and 2015), such as the gains and losses for each LULC class.

Transition potential: at this stage, the model is structured and the areas with the greatest potential for transition are identified. For this, the variables that can act as LULC drivers are selected and tested according to their explanatory power and include incentives and constraints. In this study, roads and highways digital maps were used, since the distances from them are factors that may favour or limit the expansion of a given land use category. Federal and state conservation units’ maps were included in the modelling as constraints, especially the agriculture and pasture expansion. Table 1 presents the data used in the models and their source, which were pre-processed using the ArcGis™ 10.5 software from ESRI®.

Other variables used in LCM were predictors and consisted of elevation, slope and distance to Rio Grande River, distance to conservation areas, distance to mosaic of agriculture and pasture and distance to roads. These variables were adopted because, in a previous analysis (Cramer V), they were the most relevant and reached a minimum accuracy of 75% when tested in the multilayer perceptron (MLP), an artificial neural network model as can be seen in section 3.2. Cramer V determines the

Table 1. Digital maps used in LCM

Variables	Data source	Scale
Land use	MapBiomias Project, 3 rd collection (http://mapbiomas.org)	spatial resolution: 30m
Topography	Brazilian Institute of Geography and Statistics - IBGE (https://downloads.ibge.gov.br/downloads_geociencias.htm)	1:25000
Hydrography	National Water Agency - ANA (http://metadados.ana.gov.br/geonetwork/srv/pt/main.home)	1:25000
Roads and highways	Department of Roads and Roadways of the State of Rio de Janeiro (http://www.der.rj.gov.br/mapas_n/index.htm)	1:450000
Conservation units	State Institute of Environment (http://www.inea.rj.gov.br/cs/groups/public/@inter_dibap/documents/document/zzew/mtiz/-edisp/inea0123058.pdf)	1:1100000

association between two variables with a value of 0 representing no association (complete independence) and a value of 1 representing complete association (dependence) (Boylan *et al.*, 2018).

Validation and future projection: the 2012 and 2015 maps were used for model calibration. After calibration, the 2017 forecast was made and the map obtained was compared with the real 2017 map to validate the model. Markov Chain analysis is used to generate prediction maps for the year specified. The Markovian process is a method in which a predicted system can be estimated by finding its previous state and the probability of conversion from one state to another (Nelson *et al.*, 2010).

The test accuracy or overall performance was assessed through the Area Under the Curve (AUC) index. The AUC value ranges between 0 to 1 and was calculated by the Receiver Operator Characteristic (ROC) which is used to compare the probability of an occurrence against a boolean map which shows the actual occurrences (Eastman, 2012). In the ROC curve, the horizontal axis represents the false positive rate and the vertical axis the true positive rate. AUC connects the points obtained by the various thresholds. If the true events coincide perfectly with the higher ranked probabilities, then the AUC is equal to 1 (ideal model) (Eastman, 2012; Mas *et al.* 2013). Once the model was validated, the next step was to generate the LULC map for 2030. The Change Prediction tab concludes the analysis, by defining a prediction year (Magalhães *et al.* 2020).

This work used a MLP methodology. MLP extracts samples from areas that underwent change or not from the two land cover maps provided. This method runs on automatic, making decisions on how to best use data provided to model transitions (Eastman, 2012). Decisions on the number of training samples size, number of iterations, and learning rates can be made by the user. All values used here were IDRISI’s default.

3. SOIL AND WATER ASSESSMENT TOOL (SWAT)

The Soil and Water Assessment Tool (SWAT) was developed by the US Department of Agriculture and A&M University of Texas. The steps to obtain the streamflow regime using SWAT included the insertion of the data used in the modelling (Table 2), followed by the discretization of 32 parameterized sub-basins in 271 hydrological response units (HRUs). A HRU is the basic unit where the hydrological components were simulated, aggregated for each sub-basin and routed to the basin outlet throughout the channel network (Arnold *et al.*, 2012). For data standardization, this work used downscaling (Zhou *et al.*, 2015).

Table 2. Input data entered in SWAT

Variables	Data source	Scale
DEM	Obtained from topography and hydrography from the tool Topo to Raster application on ArcGis 10.5 software.	1:25000
Precipitation	National Water Agency – ANA (http://metadados.ana.gov.br/geonetwork/srv/pt/main.home) (stations 02242009 e 02242022)	-
Air temperature, solar radiation and relative humidity	Global Weather Database (https://swat.tamu.edu/media/99082/cfsr_world.zip)	-
Soil map	Brazilian Institute of Geography and Statistics – IBGE (ftp://geoftp.ibge.gov.br/informacoes_ambientais/pedologia/vetores/brasil_5000_mil)	1:5000000
Land use	MapBiomias (http://mapbiomas.org/)	spatial resolution: 30m

The subsequent steps were warm-up, sensitivity analysis, model parameters calibration, validation and future scenarios simulation. In this phase was applied the software SWAT-Calibration and Uncertainty Programs (SWAT-Cup) and the algorithm Sequential Uncertainty Adjustment (SUF12). SUF12 function performs the sensitivity analysis that minimizes the uncertainties imposed by the model parameters variations (Abbaspour *et al.*, 2007; Narsimlu *et al.*, 2015). The algorithm was adopted because it needs a minimum number of model simulations to obtain high quality calibration and uncertainty results (Narsimlu *et al.*, 2015).

In order to obtain data with high percentages for calibration, as Andrade *et al.* (2012) and Narsimlu *et al.* (2015) did, were used in this stage the data related to 70% of the historical series (1966-2003), the remaining (30%) was applied in validation (2004-2018). The first 5 years of the model were set aside for the warm-up period required by the system stabilization to reduce systematic error. The time scale used in all stages was monthly because the daily-simulated data may be less accurate and in an analysis with a longer period, the hydrological processes tend to be more stable (Pontes *et al.*, 2016).

In the calibration and validation results evaluation, the Nash and Sutcliffe (NS) model efficiency coefficient, the coefficient of determination (R^2) and the percent bias (PBIAS) were used. NS values vary from infinity to 1, PBIAS evaluates the tendency of the simulations as being higher or lower than the observed data, positive PBIAS indicates an overestimation while a negative value indicates an underestimation (Zhang *et al.*, 2020). PBIAS is defined as satisfactory when obtaining values lower than ± 10 (Moriassi *et al.*, 2007). R^2 and NS values greater than 0.5 classify as satisfactory and equal of 1 corresponds to a perfect match (Moriassi *et al.*, 2007; Sao et al, 2020). NS, PBIAS, and R^2 were calculated as follows (Equation 1, 2 and 3):

$$PBIAS = 100 \left(\frac{\sum_{i=1}^N (Q_{sim,i} - Q_{obs,i})}{\sum_{i=1}^N (Q_{obs,i})} \right) \quad \text{Equation 1}$$

$$NSE = 1 - \frac{\sum_{i=1}^N (Q_{obs,i} - Q_{sim,i})^2}{\sum_{i=1}^N (Q_{obs,i} - Q_{obs}^-)^2} \quad \text{Equation 2}$$

$$R^2 = \frac{\left[\sum_{i=1}^N (Q_{obs,i} - Q_{obs}^-) (Q_{sim,i} - Q_{sim}^-) \right]^2}{\sum_{i=1}^N (Q_{obs,i} - Q_{obs}^-)^2 \sum_{i=1}^N (Q_{sim,i} - Q_{sim}^-)^2} \quad \text{Equation 3}$$

Where Q_{obs} and Q_{sim} are the observed and SWAT simulated streamflow (m^3/s), and Q_{obs}^- and Q_{sim}^- are the mean observed and SWAT simulated streamflow (m^3/s), respectively; N is the number of samples, and i is the *ith* sample (Zhang *et al.*, 2020).

After model calibration and validation, a new simulation to identify streamflow data, for the period of 2019 to 2030, were carried out. An increase in precipitation is expected for the region where the ARG sub-basin is inserted as a consequence of climate change (Magrin *et al.*, 2014), with an increase of 6% until 2039 (Barata *et al.* 2020). So, this study does not consider climate projections to inform future precipitation as the expected increase is low for the near future (2030). Instead, the historical precipitation data used was the same of 2007 to 2018 (measured by rain gauge), because this period recorded some of the lowest annual accumulated precipitation values, thus representing the most critical scenario in water availability terms.

To obtain LULC maps applied in the new simulation, authors used the LCM tool for 2030. The other parameters such as the DEM and the soil type map were the same as those entered in the first modelling because there are not significant changes on surface relief and soil typology occurred within the analysed time series. In other words, in order to achieve the objectives of this study, simplification was necessary by fixing some parameters (soil type, relief, precipitation) and only LULC was varied.

RESULTS

1. CURRENT LULC AND WATER AVAILABILITY

In 2017, forest category predominates in the ARG sub-basin occupying 62% of the total area, mainly in higher altitude sites where the conservation units are located predominantly. Unlike the mosaic of agriculture and pasture (19% of the total area) and pasture (16% of the total area) were located in the flattest sites such as the Rio Grande River and its tributaries.

Regarding water availability, Figure 3A illustrates the annual minimum flows registered at least once in Rio Grande between 1966 and 2018. From this time series, it is possible to observe that smaller flows occurred in the 70s and in the recent years of 2014, 2015, 2017 and 2018, where values lower than average (2.5 m³/s) were found. The lowest flow recorded in the entire historical series was in 2015 (1.00 m³/s, occurring only once), followed by 2017 (1.24 m³/s, flow recorded during three consecutive days). In these years, one of the lowest annual accumulated precipitation since 1995 was recorded, reaching 856.5 mm in 2014 (Figure 3B).

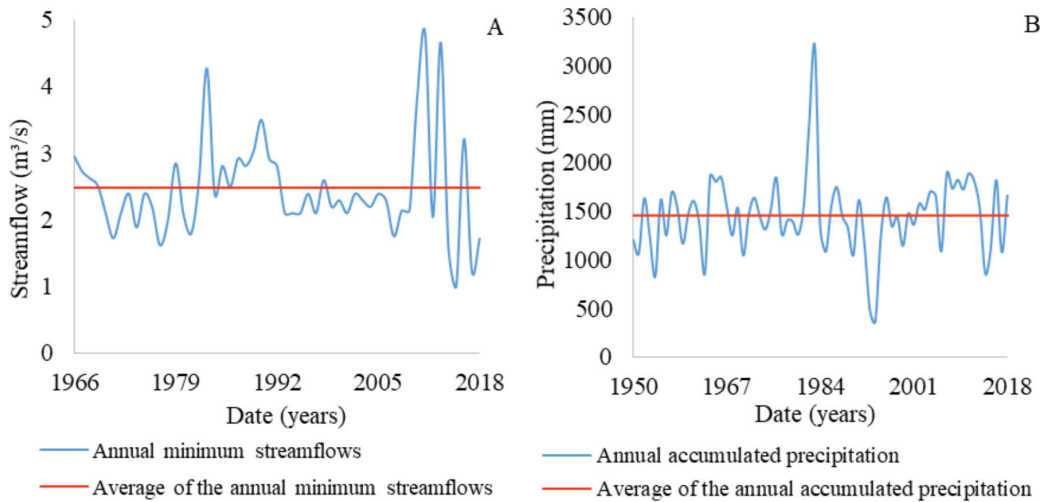


Figure 3. Minimum flows observed in Rio Grande between 1966 and 2018 (A) and annual accumulated precipitation between 1950 and 2018 (B).

3.2 PROJECTION OF LULC AND WATER AVAILABILITY FOR THE YEAR 2030

All the variables were tested, using Cramer V's analysis (Table 3) and selected for the transition sub-model, that is, the transition probability between LULC categories. To determine the transition potential, a neural network was used, as this is the method that presented the best performance (Lin

et al., 2011; Sangermano *et al.*, 2012). According to Akoglu (2018), Cramer V is used to measure association strength between two or more variables. It varies between 0 and 1, a value close to 0 means no association between variables and values close to one indicates a strong association between the variables.

Table 3. Predictor variables used in LCM and Cramer's V values

Variables predictors	Cramer V
Elevation	0.1692
Slope	0.1961
Distance to Rio Grande river	0.1386
Distance to conservation areas	0.2037
Distance to mosaic of agriculture and pasture	0.2793
Distance to roads	0.1948

Cramer V's analysis does not limit the use of a given variable. The values obtained in this analysis only indicate the association degree between the variables, however, even having a value considered low, since the variable is determined to be important for the studied transition, it can be used regardless of the Cramer V value obtained (Akoglu, 2018). Thus, in addition to considering the Cramer's V values, the selection of variables considered the minimum accuracy of 75% (Magalhães *et al.* 2020) using MLP.

The methods applied for LCM validation presented high values, with AUC equal to 0.85. AUC values between 0.7 and 0.8 are considered acceptable, 0.8 to 0.9 is considered excellent, and more than 0.9 is considered outstanding (Mandrekar 2010). The excellent performance of the LCM can be observed in Table 4, where the greatest difference between the projected and observed LULC for 2017 was 1.1 km² and occurred for the forest category. From the digital maps and the LCM application, it was possible to obtain the LULC map for 2030 (Figure 4) and losses and gains for each category (Figure 5). There was a decrease of only 0.3 km² in area for the waterproofed areas category between 2017 and 2030. In contrast, there was an increase in area for the forest category (7.6 km²) followed by the pasture (3.9 km²). Mosaic of agriculture and pasture was the category that most contributed to the expansion of forests and pastures, with a reduction from 45.4 km² in 2017 to 34.2 km² in 2030.

Table 4. Areas in km² for the LULC observed in the Alto Rio Grande sub-basin

Land use categories	2012	2015	2017 observed	2017 projected	2030
Forest	145.1	143.3	147.3	146.2	154.9
Pasture	44.2	38.5	38.6	39.6	42.5
Agriculture and pasture	41.4	49.8	45.4	45.8	34.2
Waterproofed areas	5.3	4.4	4.7	4.4	4.4
Total	236.0	236.0	236.0	236.0	236.0

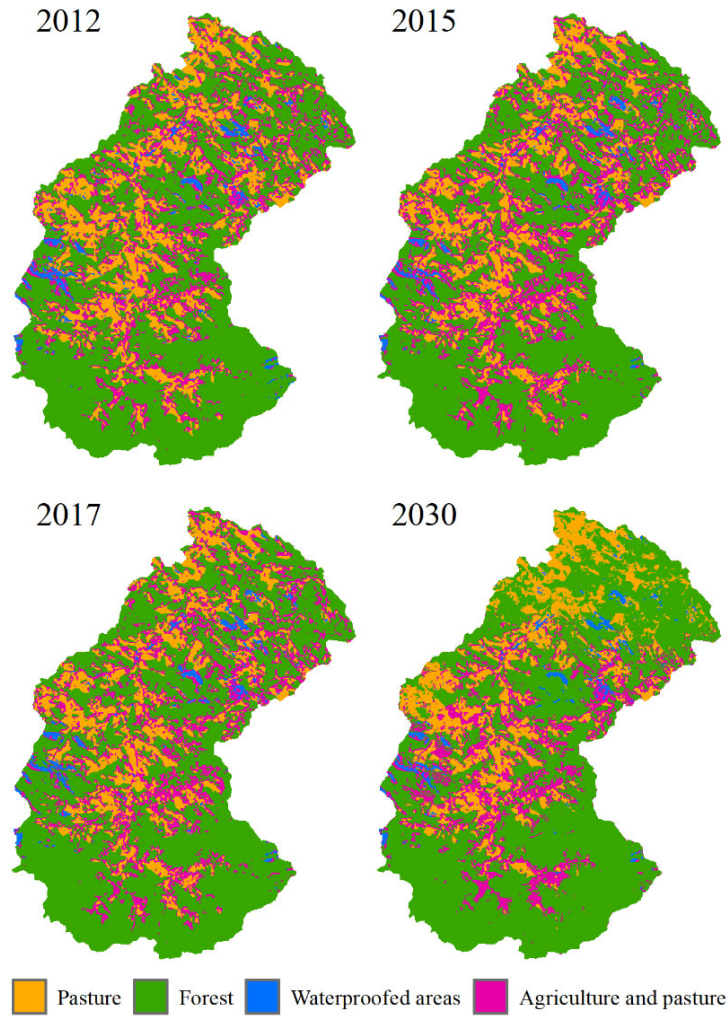


Figure 4. Land use and land cover for Alto Rio Grande sub-basin considering the years 2012, 2015, 2017 and the projection for 2030

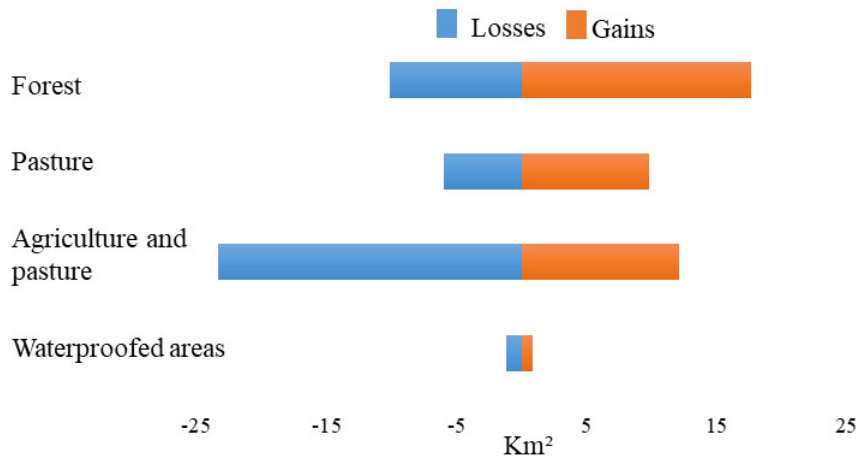


Figure 5. Land use and land cover transition matrix from 2017 - 2030 with losses and gains

Figure 6 shows the expected changes between 2017 and 2030 for each LULC category. The south of the ARG sub-basin is the region where some conservation units are located and therefore no changes are expected since this location was included in the modeling as a restriction of anthropogenic use. For the other categories, it is possible to observe that the most significant changes actually occurred with the conversion of agricultural areas to pasture and forests. It is also possible to observe a displacement of agricultural areas that moved from the north of the sub-basin to the central region.

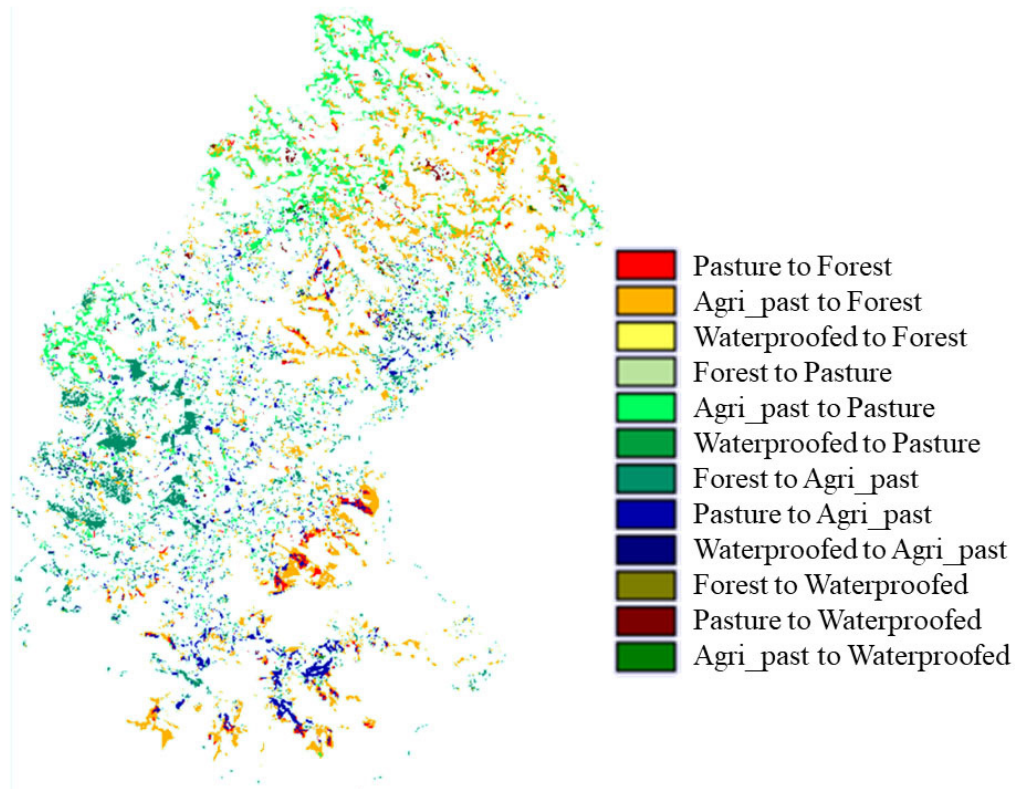


Figure 6. Trend of land use and land cover dynamics for 2017 - 2030

Table 5 presents the hydrological modelling performance executed in SWAT and Figure 7 shows the observed versus simulated streamflow for the validation and simulation steps and R^2 values. The rates of NS and R^2 values were greater than 0.5, being considered satisfactory in both the calibration and validation steps (Moriassi *et al.*, 2007; Sao et al, 2020). PBIAS value is considered very good for calibration step ($< \pm 10$) and unsatisfactory for validation step ($\geq \pm 25$) (Moriassi *et al.*, 2007) which indicates that 37.6% of the monthly values flow rates were underestimated.

In Figure 8 it is possible to observe this behaviour in the validation step (2004 - 2018). The periods where the flow rates in Rio Grande were lower; there was a greater discrepancy between the observed and simulated values. It is also possible to observe the difficulty of the model in simulating flow peaks, presenting underestimated values. It is possible to observe also that the biggest discrepancies between the observed and simulated values occurred in the years 2011 to 2013.

In this study, only LULC was varied in the SWAT model while the other variables were fixed. Thus, it is possible to counteract, for example, the same rainfall conditions and the flow in Rio Grande

Table 5. Monthly performance assessment indices of the SWAT model

Parameters	Calibration (1966-2003)	Validation (2004-2018)
R ²	0.64	0.82
NS	0.63	0.54
PBIAS (%)	2.1	37.6

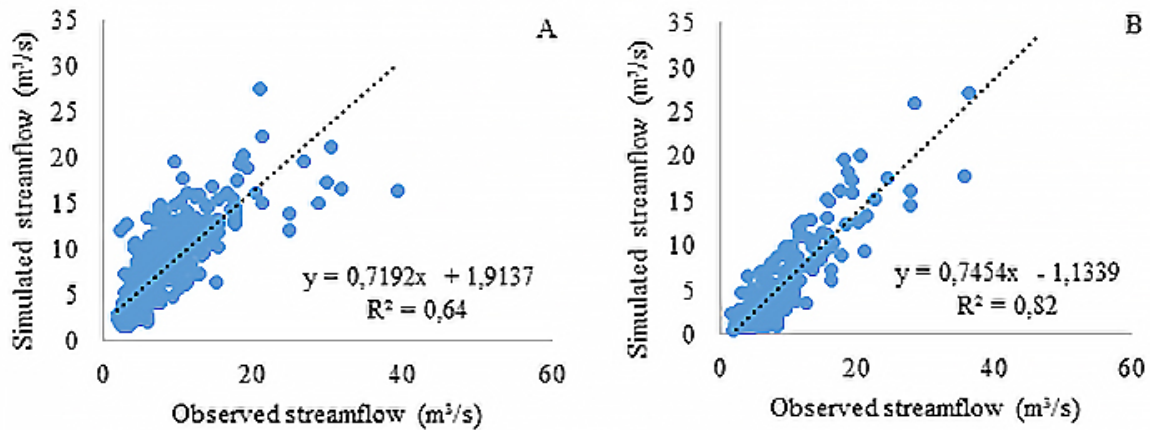


Figure 7. Observed versus simulated monthly streamflow for calibration (A) and validation step (B)

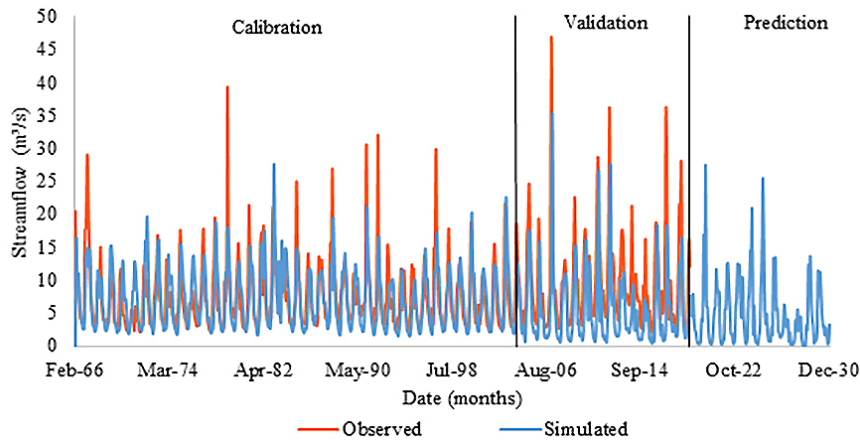


Figure 8. Monthly-simulated streamflows observed (blue) and simulated (red) in Rio Grande

considering the land use observed in 2017 and projected for 2030. By making this comparison, it was possible to observe a reduction in peak stream-flows of up to 59% in 2030. Moreover, it was found that for the land use projected for 2030 there would be a reduction in the average monthly flow of up to 63% in relation to the observed flow considering the land use of 2017. Another characteristic was the lower variation in flow over the year when comparing the estimated flows for land use projected for 2030 with the land use observed in 2017. For the same annual accumulated precipitation of 1661.6 mm, the monthly flows observed considering the land use of 2017 and 2030 varied

between 2.4 and 27.7 m³/s (amplitude of 25.3 m³/s) and between 0.4 and 11.3 m³/s (amplitude of 10.9 m³/s) respectively.

These results are accompanied by a reduction in flow in Rio Grande for the next 10 years, both in the dry and rainy season. The most critical condition will occur if the precipitations observed in 2014 are repeated (lowest annual accumulated precipitation, 856.5 mm). In this scenario, minimum flows have reached values close to zero while maximum flow will be below 6.0 m³/s. It is important to note that an underestimation may have occurred because the model underestimated the flows in the validation step.

DISCUSSION

The ARG sub-basin is inserted in the Atlantic Forest biome, which suggests that, before colonization, the region's main land cover was forests. After colonization, there were changes to other uses, such as pastures and agriculture, which occurred in the smallest slopes observed in the ARG sub-basin. The steeper areas present limitations on agricultural mechanization because they affect the machines stability and the movement speed. It also does not indicate high declivities for raising animals, and may adversely affect growth and production. This characteristic restricts the anthropogenic use of conservation areas, which are predominantly located in higher altitude regions, and favour the maintenance of forests.

The LULC contributed to reducing water availability in recent years in the ARG sub-basin. The increase in potentially agricultural areas in 2015 probably resulted in an increase in the water consumption applied to irrigation activities which, added to the reduction in precipitation in the previous year, caused the decrease of groundwater stocks (decrease in the amount of groundwater) and a significant reduction in flow levels in the ARG sub-basin (Figure 3). In this way, the LULC associated changes in precipitation contributed to reducing water availability this year. This scenario highlights the need to identify future water availability considering the changes that will occur in LULC.

The LCM was applied in the elaboration of a prospective LULC map for the year 2030 (Figure 4). The statistical indice obtained in the validation stage indicated that the model showed excellent projection capability. For example, there was little variation in area for the waterproofed areas category between 2017 and 2030 (Table 4), which is consistent, as this category includes rocky outcrops that are less sensitive to anthropogenic actions compared to other uses.

On the other hand, an increase in the forests category was observed. It is possible to list three main factors that explain this behaviour. First (i), there were significant changes in the region's landscape after the 2011 disaster. Some affected sites have been converted from forests to exposed soil. In the following years, a gradual forest restoration was observed. Precisely the land use maps for that period were used as inputs in the LCM. LCM calculates rates of change in the change analysis step as well as transition potential maps to establish the LULC projection (Shade and Kremer 2019). In other words, one of the features of the LCM is to extrapolate the rate of change in LULC observed in previous years to a future scenario, for this reason an increase in forest areas was observed for the year 2030 once this increase occurred over the years used in the modelling (2012-2015).

This aspect consists of a LCM limitation, where all the events of change, extreme or not, that occur before and after the time interval adopted for calibration and validation, are not counted in the image produced (Amaral e Silva *et al.*, 2020; Marques *et al.*, 2021). In addition, LULC involves com-

plex and dynamic processes of human nature, such as social, institutional and economic processes, which can be difficult to detect for the variables and algorithms available in the models (Olmedo *et al.*, 2015).

Second explanatory factor (ii) is the inclusion of protected areas in the LCM. A study developed by the environmental agency of Rio de Janeiro showed that ARG sub-basin region has high potential for natural regeneration due to forest remnants and connectivity between them (INEA, 2018). This hypothesis is reinforced by observing one of the most significant changes projected to occur between 2017 and 2030, which will happen close to the conservation area, with the conversion of agricultural areas into forest (Figure 6). In addition, the predictor variable “distance to conservation areas” presented the second highest of Cramer’s V value (0.2037), which indicates that this predictor has a higher correlation with LULC compared to others such as ‘slope’ and ‘distance to roads’. Furthermore, a recent survey conducted in South-eastern Brazil found an increase in forest areas between 2001 and 2015 that was attributed to two main factors: change in Brazilian legislation, with New Forest Code (Law 12.651/2012) implementation and silviculture expansion (Moraes *et al.*, 2018).

A third justification (iii) refers to changes in the region's economic activities. Agriculture developed in the ARG sub-basin is practiced by family farmers, the landslides that occurred in 2011 resulted in soil fertility loss, agricultural equipment and other inputs losses and product flow pathways obstruction. The high cost associated with soil recovery and the structure existing before the disaster (Freitas *et al.*, 2012) are factors that can motivate the development of other economic activities and induce changes in the economic structure of the region. The distance from agricultural areas presented the highest Cramer’s V value (0.2793) among all the variables evaluated (Table 2), in addition it was possible to observe that the reduction of agricultural areas occurred in several places in the basin, that is, not were concentrated in a single region (Figure 6). All these characteristics are indications that reinforce the hypothesis of a change in the economic activity developed in the region (agriculture) to other practices (such as silviculture and cattle breeding). When projecting LULC for 2050 in a watershed located in China, Wu *et al.* (2018) also observed an increase in forest and pasture areas to the detriment of agricultural regions. The authors attributed these results to environmental protection policies and changes in the local economy.

Considering the main LULC changes expected for the ARG sub-basin in 2030 (reduction in the mosaic of agriculture and pasture category, which was accompanied by an increase in forests and pasture areas) (Table 4 and Figure 4), it is possible to make some inferences in hydrological components. For example, the decrease in the potentially quantified agricultural areas does not necessarily represent a reduction in the water demand in this activity because there is expected an increase in irrigation in Brazil (Cunha *et al.*, 2014).

The conversion of agricultural areas into pasture can provide greater surface runoff as there is less infiltration due to soil compaction by cattle, which can result in flow peaks. Conversely, the conversion of agricultural areas to forest can reduce runoff due to interception, presence of litter and infiltration. Therefore, an increase in base flow and a decrease in flow peaks can be observed, this behaviour is accompanied by an intensification of evapotranspiration, which may also reflect a lower flow in rivers. It is important to note that although pastures or agricultural crops increase the supply of readily available water in a basin, this is not an environmental benefit, as forests act in the maintenance of the minimum flow, in protecting the soil against erosion and transport of sediments. The effects

of LULC on hydrological components is a complex issue as the variables that control hydrological behaviour are many and interdependent, for this reason the SWAT model was applied.

As for the hydrological model, it is common for the statistical validation period indexes to be less satisfactory compared to the values obtained in calibration. This is because parameters are optimized specifically for calibration period and the period used in validation may present different conditions (Fukunaga *et al.*, 2015). This is the case in this study (Table 5), the lower performance in the validation stage can be attributed to the precipitation data used. When calibration and validation periods are similar, better results can be obtained. In this study, this did not occur because the period of less precipitation was accumulated in the final years of the historical series (2007 a 2018). Other ARG sub-basin particularities, such as changes in relief resulting from landslides, might also have interfered with validation performance. As shown in Figure 8, the biggest discrepancies between the observed and simulated values corresponds to the year of the disaster and the following two years.

Furthermore, ARG sub-basin has only one fluviometric station, so any inconsistency in recorded data may compromise the comparison between observed and simulated flows. Anaba et al (2017) obtained PBIAS of 23% at the validation stage of the SWAT model for a basin in Uganda. These results occurred since the use of poor observed data quality and to the possible occasional effluents discharge that could not be accounted for during the simulation. Lotz *et al.* (2018) also mention that the divergences between calibrated and validated values may be the result of localized precipitation not recorded in monitoring stations. However, this does not seem to be the case for the ARG sub-basin as the precipitation values available in the two pluviometric stations are similar, being that 65% of the data showed a coefficient of variation of less than 30% when compared. Another factor that can change the flow regime in a water body and compromise the performance of the SWAT model is the presence of reservoirs (Anaba *et al.*, 2017), which was not observed in the ARG sub-basin.

ARG sub-basin is located in a region characterized by the monsoon system, where a rainy and a dry period are well defined. However, it is expected that for the coming years (considering that the rainfall observed between 2007 and 2018 will be repeated), a reduction in the amplitude of the flows observed between the months of drought and rain will be reduced if compared with the land use observed in 2017. This behaviour was accompanied by a decrease in both the maximum and minimum flow observed with the identified LULC for 2030 compared to 2017 (Figure 8).

The increase in forest areas projected for 2030 plays an important role in these changes in the hydrological regime. In forested areas, an initial portion of precipitation is intercepted by vegetation; another portion reaches the ground and infiltrates what reduces surface runoff and flow peaks. On the other hand, forest vegetation also consumes water by evapotranspiration. In tropical forests, 67.6% of the precipitation was lost to the atmosphere through evapotranspiration (Leopoldo *et al.*, 1995). This water loss affects water availability. Saddique *et al.* (2020) observed a reduction in water yield of 48.32% and an increase in evapotranspiration of 51.93% in Upper Jhelum sub-basin between 2001 and 2018. The authors attributed these results to forest cover gain.

It is important to highlight that forests play an important role in promoting water infiltration into the soil and recharge of aquifers. However, this capacity can be affected by the relief and the stage of vegetation development. For the ARG sub-basin, which has more accentuated slopes, a higher flow velocity is expected which can reduce water infiltration and evapotranspiration possibly prevailed. In addition, Mendonça *et al.* (2009) mentions that for deforested regions there can be an increase

in flows in the first three years, followed by a decrease that can last from 15 to 20 years with the regeneration of the vegetation. Only after 40 to 50 years, when the plants are already mature, does the flow recover. These flow variations were attributed to greater evapotranspiration in the growth phase and to a subsequent drop with the ripening of the vegetation.

The comparative analysis of previously published work on future water projection shows that the magnitudes of LULC and their impacts on the hydrological regime are different because each region has its own characteristics. However, the behaviour trend is similar. For example, Marhaento *et al.* (2018) evaluated the future hydrological response to changes in land use in the Samin basin (Indonesia) using Markov chain, multi-criteria evaluation and SWAT. According to the authors, in 2000, 42.3% of the total area was forest. In a more conservative scenario, it is expected that by 2050 forested areas will occupy 30% and agricultural areas 52.1%. The future hydrologic response indicates a reduction in evapotranspiration which was accompanied by an increase in streamflow of up to 20%.

Another example, a study made by Abe *et al.* (2018) identified the potential future LULC impacts on the hydrological regime of the Upper Crepori River basin (Brazil) using the SWAT model. The authors considered two land use scenarios for 2050, one less conservative (50.67% of the area will be forest while 46.39% will be pasture) and another more conservative (76.22% forest and 20.84% pasture). They found that the changes expected for 2050 in the flow regime showed that the less and more conservative scenario presented increases of up to 11% and 22%, respectively, during the rainy season, and reductions of up to 19% and 32%, respectively, during the dry season. Percentages were calculated in relation to land use before the anthropic changes where the forests corresponded to 99.63% of the area.

Regional studies of LULC and water availability should be conducted in order to consider local particularities. In this context, the present research presents a worrying result, because in the case of a rainfall of less than 856.5 mm, the streamflow in Rio Grande will be close to zero. With the possibility of reducing water availability in the ARS sub-basin, adopting preventive measures is extremely necessary in order to promote water security in the region.

It is important to highlight that additional studies are needed because the aim of this study was to determine the projection of LULC for 2030 and the consequences of the projected changes on water availability considering a low rainfall scenario, as this is the most critical condition. The impacts of LULC alone on the stream flow of Rio Grande for the year 2030 was determined. Climate changes were not considered and this should be the focus of future research.

CONCLUSIONS

The changes in landscape that occurred in the ARG sub-basin in 2011 probably affected the results obtained in this study. Limitations such as LCM extrapolating the rate of forested areas recovery to the year 2030 and the changes in flow that occurred between 2011 and 2013 compromised the SWAT validation stage. Despite the limitations, results obtained in this study indicate an increase in forested areas and pastures to the detriment of agricultural areas. Due to these changes, a decrease in water availability was projected, reaching values close to zero during drought periods and a smaller amplitude between the peaks of maximum and minimum flow rates.

These results, despite presenting possible inconsistencies, will help to formulate strategies for water resources management and the adoption of measures to promote water security in the region. In

addition, the combination of the LCM and the SWAT proved to be a highly valuable tool in terms of the management and monitoring of the water availability of the regions, as it makes possible the modelling of extreme events, allowing for greater adequacy and precision to the characteristic conditions of the studied area.

ACKNOWLEDGMENTS

Coordenação de Aperfeiçoamento de Pessoal de Nível Superior - Brasil (CAPES) [Finance Code 001], supported this work.

DECLARATION OF INTEREST STATEMENT

The authors declare that they have no conflict of interest.

REFERENCES

- Abbasi A, Amirabadizadeh M, Afshar AA, Yaghoobzadeh M, 2021. Potential influence of climate and land-use changes on green water security in a semi-arid catchment. *J Water Clim Chang*. <https://doi.org/10.2166/WCC.2021.055>
- Abbaspour, K.C., Yang, J., Maximov, I., Siber, R., Bogner, K., Mieleitner, J., Zobrist, J., Srinivasan, R., 2007. Modelling hydrology and water quality in the pre-alpine/alpine Thur watershed using SWAT. *J. Hydrol.* 333, 413–430. <https://doi.org/10.1016/j.jhydrol.2006.09.014>
- Abe, C.A., Lobo, L.F., Dibike, Y.B., Costas, M.P.F., Santos, V., Novo, E.M.L.M., 2018. Modelling the Effects of Historical and Future Land Cover Changes on the Hydrology of an Amazonian Basin. *Water*, 10, 932. <https://doi:10.3390/w10070932>
- AGEVAP, 2013. Integrated Environmental Assessment of the Pomba, Muriaé, Piabanha, Paraíbuna and Preto Rivers - Paraíba do Sul River Basin – I ECOBRJ.
- AGEVAP, 2014. Elaboration of the state plan for water resources in the State of Rio de Janeiro: R2-F - Environmental characterization.
- AGEVAP, 2017. Situation Report 2017 - Rio Dois Rios Committee [WWW Document]. URL <http://cbhriodoisrios.org.br/downloads/relatorio-de-situacao-2017.pdf> (accessed 6.15.20).
- Akoglu, H., 2018. User's guide to correlation coefficients. *Turkish J. Emerg. Med.* 18 (3): 91–93. <https://doi.org/10.1016/j.tjem.2018.08.001>
- Amaral e Silva, A., Braga, M.Q., Ferreira, J., Juste dos Santos, V., do Carmo Alves, S., de Oliveira, J.C., Calijuri, M.L., 2020. Anthropogenic activities and the Legal Amazon: Estimative of impacts on forest and regional climate for 2030. *Remote Sens. Appl. Soc. Environ.* 18, 100304. <https://doi.org/10.1016/j.rsase.2020.100304>
- ANA, 2017. Atlas Irrigation [WWW Document]. URL <http://atlasirrigacao.ana.gov.br/> (accessed 6.15.20).
- Anaba, L.A., Banadda, N., Kiggundu, N., Wanyama, J., Engel, B., Moriasi, D., 2017. Application of SWAT to Assess the Effects of Land Use Change in the Murchison Bay Catchment in Uganda. *Comput. Water, Energy, Environ. Eng.* 06, 24–40. <https://doi.org/10.4236/cweee.2017.61003>
- Anand, J., Gosain, A.K., Khosa, R., 2018. Prediction of land use changes based on Land Change Modeler and attribution of changes in the water balance of Ganga basin to land use change using the SWAT model. *Sci. Total Environ.* 644, 503–519. <https://doi.org/10.1016/j.scitotenv.2018.07.017>
- Andrade, B.D.S., Singh, C.L., Santos, J.A., Gonçalves, V.V.C., Siqueira-Souza, F.K., Freitas, C.E. de C., 2019. Efeitos das mudanças climáticas sobre as comunidades de peixes na Bacia Amazônica. *Rev. Ciências da Soc.* 2, 107. <https://doi.org/10.30810/rcs.v2i4.905>

- Andrade, M.A., de Mello, C.R., Beskow, S., 2012. Hydrological simulation in a watershed with predominance of Oxisol in the upper Grande river region, MG - Brazil. *Rev. Bras. Eng. Agric. e Ambient.* 17, 69–76. <https://doi.org/10.1590/S1415-43662013000100010>
- Arnold, J.G., Moriasi, D.N., Gassman, P.W., Abbaspour, K.C., White, M.J., Srinivasan, R., Santhi, C., Harmel, R.D., Van Griensven, A., Liew, M W Van, Kannan, N., Jha, M.K., Harmel, D., Member, A., Liew, Michael W Van, Arnold, J.-F.G., 2012. SWAT: model use, calibration, and validation. *Trans. ASABE* 55, 1491–1508.
- Barata, M.M.L., Bader, D.A., Dereczynski, C., *et al.* 2020. Use of Climate Change Projections for Resilience Planning in Rio de Janeiro, Brazil. *Front Sustain Cities.* 2, 1-10. <https://doi.org/10.3389/FRSC.2020.00028>
- Baptista, A.C., 2009. Assessment of susceptibility to mass movements, erosion and runoff in Nova Friburgo, RJ. Viçosa Minas Gerais. Universidade Federal de Viçosa. URL <https://www.locus.ufv.br/handle/123456789/820> (accessed 6.15.20).
- Bieger, K., Hörmann, G., Fohrer, N., 2013. The impact of land use change in the Xiangxi Catchment (China) on water balance and sediment transport. *Reg. Environ. Chang.* 15, 485–498. <https://doi.org/10.1007/s10113-013-0429-3>
- Boylan, M., Suchman, K., Viggdorichik, J., Slover, J. & Bosco, J. (2018) Technology-Assisted Hip and Knee Arthroplasties: An Analysis of Utilization Trends. *J. Arthroplasty*, 33, 1019–1023. doi:10.1016/j.arth.2017.11.033
- Britto, A.L., Maiello, A., Quintslr, S., 2018. Water supply system in the Rio de Janeiro Metropolitan Region: Open issues, contradictions, and challenges for water access in an emerging megacity. *J. Hydrol.* <https://doi.org/10.1016/j.jhydrol.2018.02.045>
- Cunha, D.A., Coelho, A.B., Féres, J.G., Braga, M.J., 2014. Effects of climate change on the adoption of irrigation in Brazil [in Portuguese]. *Acta Sci. - Agron.* 36, 1–9. <https://doi.org/10.4025/actasciagron.v36i1.15375>
- Eastman, J.R., 2012. IDRISI selva manual version 17. Worcester, Mass. Clark Labs, Clark University, USA, pp. 322.
- Eastman, J.R., Toledano, J. 2018. A Short Presentation of the Land Change Modeler (LCM). 499–505. https://doi.org/10.1007/978-3-319-60801-3_36
- FAO, 2011. The state of the world's land and water resources for food and agriculture managing systems at risk.
- Freitas, C.M., de Carvalho, M.L., Ximenes, E.F., Arraes, E.F., Gomes, J.O., 2012. Vulnerabilidade socioambiental, redução de riscos de desastres e construção da resiliência - lições do terremoto no Haiti e das chuvas fortes na região serrana, Brasil. *Cienc. e Saude Coletiva* 17, 1577–1586. <https://doi.org/10.1590/S1413-81232012000600021>
- Fukunaga, D.C., Cecílio, R.A., Zanetti, S.S., Oliveira, L.T., Caiado, M.A.C., 2015. Application of the SWAT hydrologic model to a tropical watershed at Brazil. *Catena* 125, 206–213. <https://doi.org/10.1016/j.catena.2014.10.032>
- Gabiri, G., Leemhuis, C., Diekkrüger, B., Näschen, K., Steinbach, S., Thonfeld, F., 2019. Modelling the impact of land use management on water resources in a tropical inland valley catchment of central Uganda, East Africa. *Sci. Total Environ.* 653, 1052–1066. <https://doi.org/10.1016/j.scitotenv.2018.10.430>
- IBGE, 2017. IBGE Cities - Panorama [WWW Document]. URL <https://cidades.ibge.gov.br/brasil/rj/nova-friburgo/panorama> (accessed 6.15.20).
- INEA, 2018. Rio de Janeiro public supply water atlas - subsidies for territorial organizing and planning [WWW Document]. URL http://www.inea.rj.gov.br/wp-content/uploads/2019/01/Livro_Atlas-dos-Mananciais-de-Abastecimento-do-Estado-do-Rio-de-Janeiro.pdf (accessed 6.15.20).
- INEA, 2020. Licenses issued [WWW Document]. URL <http://200.20.53.7/listalicensas/views/pages/lista.aspx> (accessed 6.15.20).
- INEA, 2014. Elaboration of the state plan for water resources of the state of rio de janeiro R8-B - Demand scenarios and water balance [WWW Document]. URL <http://www.agevap.org.br/downloads/Relatorio-Cenarios-Demandas.pdf> (accessed 6.15.20)
- INMET, 2021. Brazilian climatological standards 1981-2010. [WWW Document]. URL https://clima.inmet.gov.br/NormaisClimatologicas/1961-1990/precipitacao_acumulada_mensal_anual (accessed 09.25.21)

- Jodar-Abellan, A., Valdes-Abellan, J., Pla, C., Gomariz-Castillo, F., 2019. Impact of land use changes on flash flood prediction using a sub-daily SWAT model in five Mediterranean ungauged watersheds (SE Spain). *Sci. Total Environ.* 657, 1578–1591. <https://doi.org/10.1016/j.scitotenv.2018.12.034>
- Joly, C.A., Scarano, F.R., Bustamante, M., Gadda, T.M.C., Metzger, J.P.W., Seixas, C.S., Ometto, J.P.H.B., Pires, A.P.F., Boesing, A.L., Sousa, F.D.R., Quintão, J.M.B., Gonçalves, L.R., Padgurschi, M. de C.G., de Aquino, M.F.D.S., de Castro, P.F.D., Dos Santos, I.L., 2019. Brazilian assessment on biodiversity and ecosystem services: Summary for policy makers. *Biota Neotrop.* 19. <https://doi.org/10.1590/1676-0611-bn-2019-0865>
- Joorabian Shooshtari, S., Shayesteh, K., Gholamalifard, M., Azari, M., Serrano-Notivoli, R., López-Moreno, J.I., 2017. Impacts of future land cover and climate change on the water balance in northern Iran. *Hydrol. Sci. J.* 62, 2655–2673. <https://doi.org/10.1080/02626667.2017.1403028>
- Kafy, A-Al, Hasan, M.M., Faisal, A.-A.-, Islam, M., Rahman, M.S., 2020. Modelling future land use land cover changes and their impacts on land surface temperatures in Rajshahi, Bangladesh. *Remote Sens. Appl. Soc. Environ.* 18, 100314. <https://doi.org/10.1016/j.rsase.2020.100314>
- Krysanova, V., White, M., 2015. Advances in water resources assessment with SWAT—an overview. *Hydrol. Sci. J.* 60, 1–13. <https://doi.org/10.1080/02626667.2015.1029482>
- Kumar, N., Tischbein, B., Beg, M.K., 2019. Multiple trend analysis of rainfall and temperature for a monsoon-dominated catchment in India. *Meteorol. Atmos. Phys.* 131, 1019–1033. <https://doi.org/10.1007/s00703-018-0617-2>
- Lin, Y.-P., Chu, H.-J., Wu, C.-F., Verburg, P.H., 2011. Predictive ability of logistic regression, auto-logistic regression and neural network models in empirical land-use change modeling – a case study. *Int. J. Geogr. Inf. Sci.* 25, 65–87. <https://doi.org/10.1080/13658811003752332>
- Lotz, T., Opp, C., He, X., 2018. Factors of runoff generation in the Dongting Lake basin based on a SWAT model and implications of recent land cover change. *Quat. Int.* 475, 54–62. <https://doi.org/10.1016/j.quaint.2017.03.057>
- Magalhães I.B., Pereira A.S.A.P., Calijuri M.L, *et al.* 2020. Brazilian Cerrado and Soy moratorium: Effects on bi-ome preservation and consequences on grain production. *Land use policy* 99:105030. <https://doi.org/10.1016/J.LAN-DUSEPOL.2020.105030>
- Magrin, G.O., Marengo, J.A., Boulanger, J.-P., *et al.* 2014. 27 Central and South America Coordinating Lead Authors: Lead Authors: Contributing Authors: Review Editors: to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change.
- Mallett, S., Halligan, S., Matthew Thompson, G.P., Collins, G.S., Altman, D.G., 2012. Interpreting diagnostic accuracy studies for patient care. *BMJ.* <https://doi.org/10.1136/bmj.e3999>
- Mandrekar, J.N. 2010. Receiver Operating Characteristic Curve in Diagnostic Test Assessment. *J Thorac Oncol* 5:1315–1316. <https://doi.org/10.1097/JTO.0B013E3181EC173D>
- MapBiomas, 2018. MapBiomas - Annual Coverage and Land Use Mapping Project in Brazil [WWW Document]. URL <http://plataforma.mapbiomas.org/map> (accessed 12.17.19).
- Marhaento, H., Booij, M.J., Hoekstra, A.Y., 2018. Hydrological response to future land-use change and climate change in a tropical catchment. *Hydrol. Sci. J.* 63, 1368–1385. <https://doi.org/10.1080/02626667.2018.1511054>
- Marques, A., Martins, I.S., Kastner, T., Plutzer, C., Theurl, M.C., Eisenmenger, N., Huijbregts, M.A.J., Wood, R., Stadler, K., Bruckner, M., Canelas, J., Hilbers, J.P., Tukker, A., Erb, K., Pereira, H.M., 2019. Increasing impacts of land use on biodiversity and carbon sequestration driven by population and economic growth. *Nat. Ecol. Evol.* 3, 628–637. <https://doi.org/10.1038/s41559-019-0824-3>
- Marques JF, Alves MB, Silveira CF, *et al* (2021) Fires dynamics in the Pantanal: Impacts of anthropogenic activities and climate change. *J Environ Manage* 299:113586. doi: 10.1016/j.jenvman.2021.113586
- Mas, J.F., Filho, B.S., Pontius, R.G., *et al.* 2013. A Suite of Tools for ROC Analysis of Spatial Models. *ISPRS Int J Geo-Information* 2013, Vol 2, Pages 869–887 2:869–887. <https://doi.org/10.3390/IJGI2030869>

- Mas, J.F., Kolb, M., Paegelow, M., Camacho Olmedo, M.T., Houet, T., 2014. Inductive pattern-based land use/cover change models: A comparison of four software packages. *Environ. Model. Softw.* 51, 94–111. <https://doi.org/10.1016/j.envsoft.2013.09.010>
- Mello, C.R., Lima, J.M., Da Silva, A.M., 2007. Surface runoff and peak discharge simulation in ephemeral watershed. *Rev. Bras. Eng. Agric. e Ambient.* 11, 410–419. <https://doi.org/10.1590/S1415-43662007000400011>
- Mendonça, L.A.R., Vásquez, M.A.N., Feitosa, J.V., *et al.* 2009. Evaluation of the infiltration capacity of soils under ferent types of management. *Eng Sanit e Ambient* 14:89–98. <https://doi.org/10.1590/S1413-41522009000100010>
- Moraes, T.C., dos Santos, V.J., Calijuri, M.L., Torres, F.T.P., 2018. Effects on runoff caused by changes in land cover in a Brazilian southeast basin: evaluation by HEC-HMS and HEC-GEOHMS. *Environ. Earth Sci.* 77, 1–14. <https://doi.org/10.1007/s12665-018-7430-6>
- Moriasi, D.N., Arnold, J.G., Liew, M.W. Van, Bingner, R.L., Harmel, R.D., Veith, T.L., 2007. model evaluation guidelines for systematic quantification of accuracy in watershed simulations, *Transactions of the ASABE*.
- Narsimlu, B., Gosain, A.K., Chahar, B.R., Singh, S.K., Srivastava, P.K., 2015. SWAT Model Calibration and Uncertainty Analysis for Streamflow Prediction in the Kunwari River Basin, India, Using Sequential Uncertainty Fitting. *Environ. Process.* 2, 79–95. <https://doi.org/10.1007/s40710-015-0064-8>
- Natkhin, M., Dietrich, O., Schäfer, M.P., Lischeid, G., 2015. The effects of climate and changing land use on the discharge regime of a small catchment in Tanzania. *Reg. Environ. Chang.* 15, 1269–1280. <https://doi.org/10.1007/s10113-013-0462-2>
- Olmedo, M.T.C., Pontius, R.G., Paegelow, M., Mas, J.F., 2015. Comparison of simulation models in terms of quantity and allocation of land change. *Environ. Model. Softw.* 69, 214–221. <https://doi.org/10.1016/j.envsoft.2015.03.003>
- Pinheiro, E.P., Marques, E.E., Lolis, S.F., 2019. Monitoramento de empreendimentos hidrelétricos na bacia do rio Tocantins, Brasil: o que aprendemos com os estudos das macrófitas aquáticas. *Biotemas* 32, 11–22. <https://doi.org/10.5007/2175-7925.2019v32n3p11>
- Piniewski, M., Bieger, K., Mehdi, B., 2019. Advancements in Soil and Water Assessment Tool (SWAT) for ecohydrological modelling and application. *Ecohydrol. Hydrobiol.* <https://doi.org/10.1016/j.ecohyd.2019.05.001>
- Pontes, L.M., Viola, M.R., Silva, M.L.N., Bispo, D.F.A., Curi, N., Pontes, L.M., Viola, M.R., Silva, M.L.N., Bispo, D.F.A., Curi, N., 2016. Hydrological Modeling of Tributaries of Cantareira System, Southeast Brazil, with the Swat Model. *Eng. Agrícola* 36, 1037–1049. <https://doi.org/10.1590/1809-4430-eng.agric.v36n6p1037-1049/2016>
- Saha, P.P., Zeleke, K., Hafeez, M., 2019. Impacts of land use and climate change on streamflow and water balance of two sub-catchments of the Murrumbidgee River in South Eastern Australia, in: *Extreme Hydrology and Climate Variability: Monitoring, Modelling, Adaptation and Mitigation*. Elsevier, pp. 175–190. <https://doi.org/10.1016/B978-0-12-815998-9.00015-4>
- Sao, D., Kato, T., Tu, L.H., *et al.* 2020. Evaluation of Different Objective Functions Used in the SUFI-2 Calibration Process of SWAT-CUP on Water Balance Analysis: A Case Study of the Pursat River Basin, Cambodia. *Water* 12, 2901. <https://doi.org/10.3390/W12102901>
- Sangermano, F., Toledano, J., Eastman, R., 2012. Land cover change in the Bolivian Amazon and its implications for REDD+ and endemic biodiversity. *Landsc. Ecol.* 27, 571–584. <https://doi.org/10.1007/s10980-012-9710-y>
- Shade, C., Kremer, P. 2019. Predicting Land Use Changes in Philadelphia Following Green Infrastructure Policies 8, 28. <https://doi.org/10.3390/LAND8020028>
- Van Cauwenbergh, N., Ballester Ciuró, A., Ahlers, R., 2018. Participatory processes and support tools for planning in complex dynamic environments: A case study on web-GIS based participatory water resources planning in Almeria, Spain. *Ecol. Soc.* 23. <https://doi.org/10.5751/ES-09987-230202>
- Wohl, E., Barros, A., Brunzell, N., Chappell, N.A., Coe, M., Giambelluca, T., Goldsmith, S., Harmon, R., Hendrickx, J.M.H., Juvik, J., McDonnell, J., Ogden, F., 2012. The hydrology of the humid tropics. *Nat. Clim. Chang.* <https://doi.org/10.1038/nclimate1556>

Wu, L., Liu, X., Ma, X., 2018. Prediction of land-use change and its driving forces in an ecological restoration watershed of the Loess hilly region. *Environ. Earth Sci.* 77. <https://doi.org/10.1007/s12665-018-7413-7>

Zaroni, M.J., Santos, H.G. dos, 2018. Solos Tropicais - Cambissolos [WWW Document]. URL https://www.agencia.cnptia.embrapa.br/gestor/solos_tropicais/arvore/CONTAG01_8_2212200611538.html (accessed 12.19.19).

Zhang, H., Wang, B., Liu, D.L., Zhang, M., Leslie, L.M., Yu, Q., 2020. Using an improved SWAT model to simulate hydrological responses to land use change: A case study of a catchment in tropical Australia. *J. Hydrol.* 585, 124822. <https://doi.org/10.1016/j.jhydrol.2020.124822>

Zhang, L., Nan, Z., Yu, W., Zhao, Y., Xu, Y., 2018. Comparison of baseline period choices for separating climate and land use/land cover change impacts on watershed hydrology using distributed hydrological models. *Sci. Total Environ.* 622–623, 1016–1028. <https://doi.org/10.1016/j.scitotenv.2017.12.055>

Zhou, J., He, D., Xie, Y., Liu, Y., Yang, Y., Sheng, H., ... Zou, R. (2015). Integrated SWAT model and statistical downscaling for estimating streamflow response to climate change in the Lake Dianchi watershed, China. *Stochastic Environmental Research and Risk Assessment*, 29(4), 1193–1210. doi:10.1007/s00477-015-1037-1